

## 技术规格 Technical specification

KVD LED Emergency Driver **Your Smart Choice**

- **产品型号 PRODUCT MODEL : KVD188P50**

应急电源用于LED高压线性灯带

LED EMERGENCY DRIVER FOR  
LED HIGH VOLTAGE LINEAR STRIP LIGHTS

版本:P01 发行日期: 2025-09-28

- **产品认证 PRODUCT CERTIFICATION :**





KVD®


应急电源自动节能  
EMERGENCY DRIVER  
AUTOMATIC ENERGY SAVING

With 100-1000W  
high-voltage  
linear lights

100W 1000W  
线性 带



## 高品质锂电池-不同容量 | HIGH-QUALITY LITHIUM BATTERIES, DIFFERENT CAPACITY

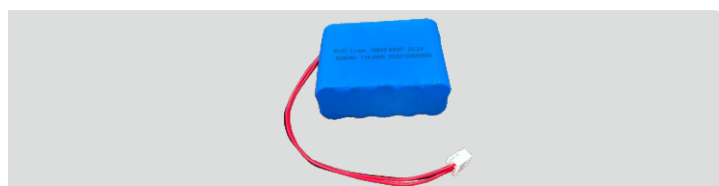

## 产品描述 | PRODUCT DESCRIPTION

KVD188P50应急电源, 内置高品质锂电池设计, 方便安装, 节省运输成本, 适用于LED大功率线性灯带,

而且参数相同都可以通用, 应急方案通过MCU恒功率输出控制, 输出电压范围覆盖60-240Vdc, 兼容并支持参数相同的灯板工作,

保护设计: 电池组有设计过充电保护, 过放电保护, 输出过载保护, 短路保护和过温保护

KVD188P50 Emergency driver kits, Built-in high-quality lithium battery design, Easy to install, Savings in transportation costs,

Application for High voltage linear light strip,


And the same parameters can be generalized, Emergency kits are controlled by **MCU** constant power outputs, its output voltage range covers 60-240V dc, Compatible and supportive of light boards working with the same parameters

Protections: batteries are designed with overcharge protection, over-discharge protection, output overload protection, short-circuit protection and over-temperature protection

## 产品特性 | PRODUCT CHARACTERISTICS

- 自动执行自检功能~每三个月自检一次  
Automatically perform self-check function~3 months automatic check once
- 应急方案通过MCU恒功率输出控制  
Emergency kits are controlled by **MCU** constant power output
- 兼容所有高压LED灯带  
Compatible with all voltage LED linear strip lights
- 使用高品质可充电锂电池,  
Using high-quality rechargeable lithium batteries ,
- 我们有空运和海运文件, 国际运输非常方便  
We have air and sea freight documents, Very convenient for international transportation
- 保护: 产品具有完善的保护功能设计  
Protections: The product has a perfect protection function
- 指示灯功能: 多种工作指示状态  
Indication light: Multiple work indication states
- 模拟停电后测试应急功能  
Mock-up electricity pause emergency testing function
- 在应急状态下 ~ 可以关闭电池放电  
In case of emergency ~ battery discharge can be turned off
- 静态下电池0功耗  
Battery zero power consumption under static state
- 认证测试标准: CE-EN-IEC 55015 / EN-IEC-61000/EN-IEC-61547  
Certification test standards: CE-EN-IEC 55015 / EN-IEC-61000/EN-IEC-61547

## 适用大功率灯具 | SUITABLE FOR HIGH-POWER LAMPS



## 型号列表 | MODEL LIST:

型号 Model	输入电压 Input Voltage	应急瓦数 Emergency watts	应急持续时间 Emergency runtime	兼容灯具功率 Compatible lamp power	输出电压范围 Output Voltage range	输出电流 Output Current	电池容量 Battery Capacity	电池类型 Battery Type
KVD188P50	100-277Vac	50 watts	120 minutes	200W	60-240V dc Max:260V	190-830mA	5200mAh 22.2V	Li-ion

技术参数 | TECHNICAL PARAMETERS

输入参数	Parameter	参数范围   Data Range	备注   Remark
输入电压	Input Voltage	100-277 Vac 50/60Hz	Range 85-290V ac
输入电流	Input Current	0.50mA Max.@230Vac	
输入充电瓦数	Input Charging Wattage	< 5.0W	
功率因数	Power Factor	≥0.5 @230Vac	
负载功率	Load Power	200W-1000W LED Lamps	Max:1000W


输出特性 | OUTPUT CHARACTERISTICS

工作模式	Operating Mode	Emergency Lighting	Use after a Power Outage
应急瓦数	Emergency Watts	50W	Subject to Actual Testing
应急输出电压	Emergency Output Voltage	DC60-240V Max.260VDC	
应急转换时间	Emergency Transfer	< 1 Second	
应急持续时间	Emergency Runtime	>120Minutes	Tested at 26°C
应急功能测试	Emergency Function Test	Worker test, Auto-test	
输出空载保护	No-load Protection	Yes	
短路保护	Short Circuit Protection	Yes	


其它特性 | OTHER CHARACTERISTICS

电池充电电流	Battery Charging Current	350mA Max.	
电池充电时间	Battery Charging Time	>48h	Normal Temperture
电池充电保护	Battery Charging Protection	Yes	
电源保护功能	Converter Protection Function	Yes	
高温保护	High Temperature Protection	60°C	Charging State
工作环境温度	Ambient Operating Temperature ta	0-50°C	Best Tested at 26°C
产品尺寸	Product Size	L300*W120*H50mm	
安规测试	Safety Test	2000Vac 5mA (input to output)	
环保	Pro-environment	Yes	ROHS Compliant
Ip等级	IP Rated	IP 65	Apply Indoor
外壳最高温度	Maximum Shell Temperature tc	75°C	
产品寿命	Service Life	3 Years	Not Including Battery
质保	Warranty	3 Years	Normal Use

接线图 | CONNECTION DIAGRAM

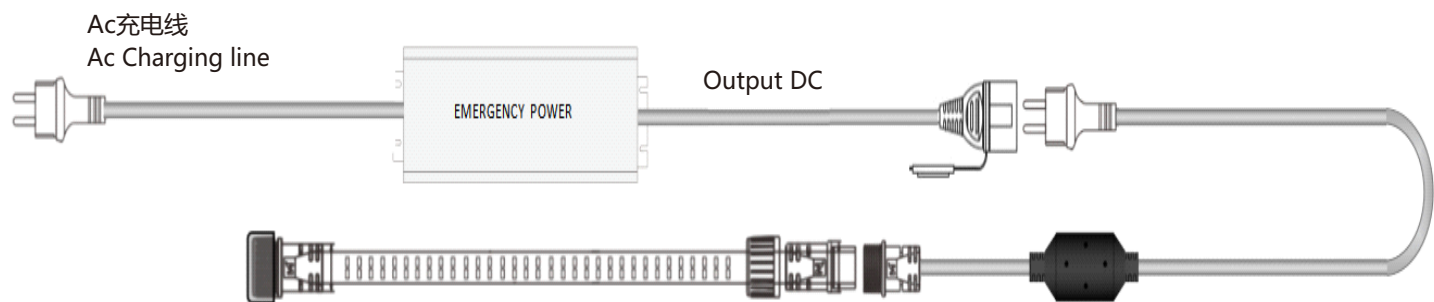

尺寸图 | MEASUREMENT

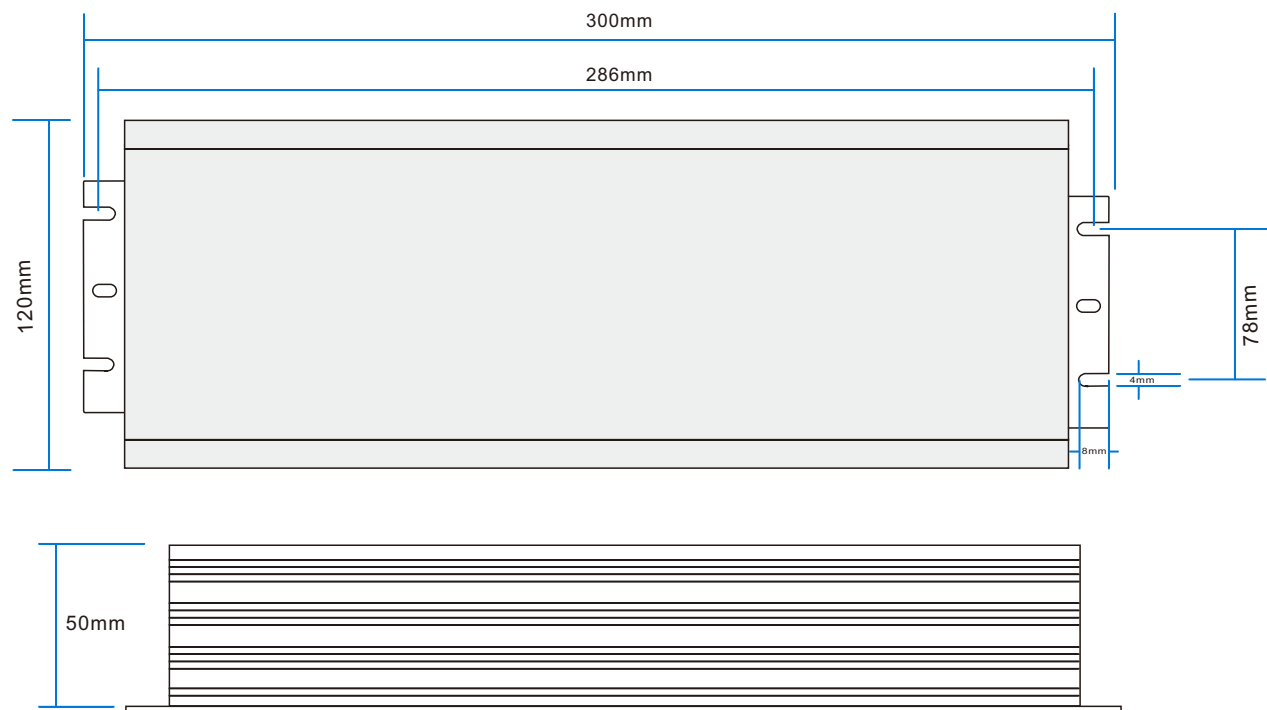


包装数据 | PACKING DETAILS

箱号	品名	规格	数量/箱	外箱尺寸	箱体积	合计净重	合计毛重	备注
CTN NO	ITEM	DESCRIBE	PCS	UN CARTON SIZE (cm)	CARTON SIZE (CBM)	T-N-W(KG)	T-G-W(KG)	Remark
1-1	Em. Driver	Power:50w	5	50*27*36	0.03292	16.5.00	18.00	

## 指示灯和按钮配件

## INDICATION LIGHT,BUTTON ACCESSORY

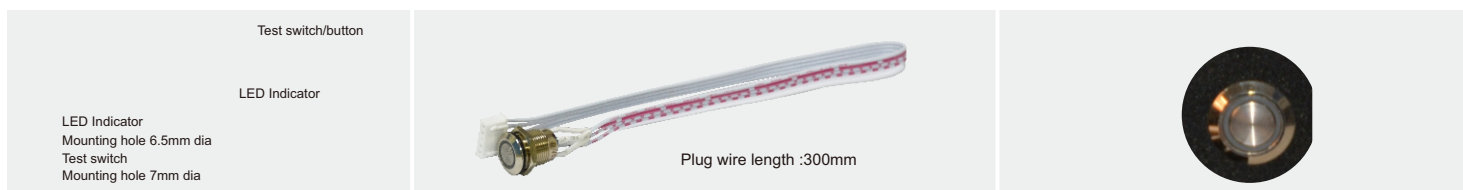

以上所有配件均可自行选择

All of the above accessories are optional

## 按钮功能 | Button function

有市电，按键短按一次，进入模拟测试

When mains electricity is on ,short press the button will enter the simulation test :

绿灯闪烁（1秒1次），短按一次关闭模拟测试，如不短按一下，模拟测试5秒后自动关闭，转换市电模式。  
with the green light flashing (once per second ).A short press again turns off the simulation test:

If no short press,the simulation test will automatically shut down after 5 seconds and switch to mains electricity mode.

连接市电切中途不断电，自动计时大于90天，进入季检模式，

Connect to mains power supply without interruption, with automatic timing exceeding 90 days, entering seasonal inspection mode.

应急时关闭电源电路系统

应急状态下，短按一下测试按钮，应急状态将关闭，再次连接市电后激活应急功能。

Shutting down the driver circuit system in the emergency status:

In an emergency state,a short press of the button will deactivated the emergency state.

Activate the emergency function after connecting to the city electricity again

## 指示灯状态 | Indicator Light Status

- 充电-绿灯  
Charging- indicator light flash on and off
- 充满-绿灯不亮  
Fully charged - green light off
- 在应急状态下绿色指示灯慢闪  
Green light: In emergency mode,green light flashing slowly
- 电池未连接-绿灯慢闪  
Battery not connected (not plugged in )- green light flashing slowly

## 自检模式 | AUTOTEST MODE

- 安装后并且通市电的状态下，季度自检功能根据时间的推移执行  
After installation and under the condition of being connected to the mains power,The seasonal self detect function executes over time.

注意 | CAUTION

- 由专业电工和技术人员连接市电，务必在断电的状态下连接电路，禁止带电操作，以免发生事故  
Connecting to the main power must be done by professional electricians or technical personnel.  
Make sure to cut off the power first before connecting the circuit. Never operate with live electricity, otherwise accidents may occur easily.
- 电池在安装使用时，请远离发热源，请在特定工作范围内使用  
When installing and using the battery, please keep it away from heat sources and operate it within the specified working range.
- 对于长期不使用电池，建议每6个月至少充放电一次  
For batteries that are not used for a long time ,it is recommended to charge and discharge them at least once every six months.
- 储存时的温度在0-35℃范围内,湿度<85%避免电池储存时间缩短。  
The storage temperature should range from 0°Cto 35°C and the humidity should be less than 85% to avoid shortening the battery storage time.
- 首次使用应急电池时，遇到电池没电的情况下或者无法启动应急功能，请先接入市电激活应急系统，并且充电24小时后在测试应急功能，  
When using the emergency battery for the first time ,if the battery is dead or the emergency function can not be activated,  
Please activate the emergency system by connecting to the mains power supply and charge the battery for 24 hours before activating the emergency function,  
请使用原装配套电池  
Please use the original emergency battery provided
- 安装和使用时，请把应急电池远离高温位置，仅安装在适合电池工作的温度范围内，最佳使用温度20℃-35℃，  
When installing and using it, please keep it away from heat sources and only use it within a certain working temperature range.  
Note:the best temperature is 20°C-35°C

变更记录 | RECORD OF CHANGES

版本	变更内容描述	变更日期	备注   Remark
P01	初次发行	2025/09/03	